

# PLUG-IN RELAYS & BASES

## - Round Footprint

- + 2 & 3 Pole - Round terminal footprint
- + With LED/Flag button as standard
- + For 35mm Din Rail



	PRR208-24AC	PRR208-24DC	PRR208-115AC	PRR208-230AC	PRRB8
<b>Description</b>	2 Pole Changeover 8 Pin, 24V AC	2 Pole Changeover 8 Pin, 24V DC	2 Pole Changeover 8 Pin, 115V AC	2 Pole Changeover 8 Pin, 230V DC	8 Pin Din Rail Base
<b>Load</b>	10A (2A Inductive) 250V AC				-
<b>Pack Qty</b>	5	5	5	5	10
<b>IP Rating</b>	IP40				-
<b>Contact Rating</b>	10A 250V AC				-
<b>AC Coil Consumption</b>	24V to 230V AC - 1.2VA				-
<b>DC Coil Consumption</b>	24V DC - 0.9VA				-
<b>Contact Material</b>	Silver Alloy				-
<b>Guarantee</b>	1 Year				-
<b>Conforms To</b>	Complies with UL / CSA				-


	PRR311-24AC	PRR311-24DC	PRR311-115AC	PRR311-230AC	PRRB811
<b>Description</b>	3 Pole Changeover 11 Pin, 24V AC	3 Pole Changeover 11 Pin, 24V DC	3 Pole Changeover 11 Pin, 115V AC	3 Pole Changeover 11 Pin, 230V DC	11 Pin Din Rail Base
<b>Load</b>	10A (2A Inductive) 250V AC				-
<b>Pack Qty</b>	5	5	5	5	10
<b>IP Rating</b>	IP40				-
<b>Contact Rating</b>	10A 250V AC				-
<b>AC Coil Consumption</b>	24V to 230V AC - 1.2VA				-
<b>DC Coil Consumption</b>	24V DC - 0.9VA				-
<b>Contact Material</b>	Silver Alloy				-
<b>Guarantee</b>	1 Year				-
<b>Conforms To</b>	Complies with UL / CSA				-

# PLUG-IN RELAYS & BASES

## - Round Footprint

### Dimensions

2 Pole / 8 Pin Changeover & 3 Pole / 11 Pin Changeover Relays

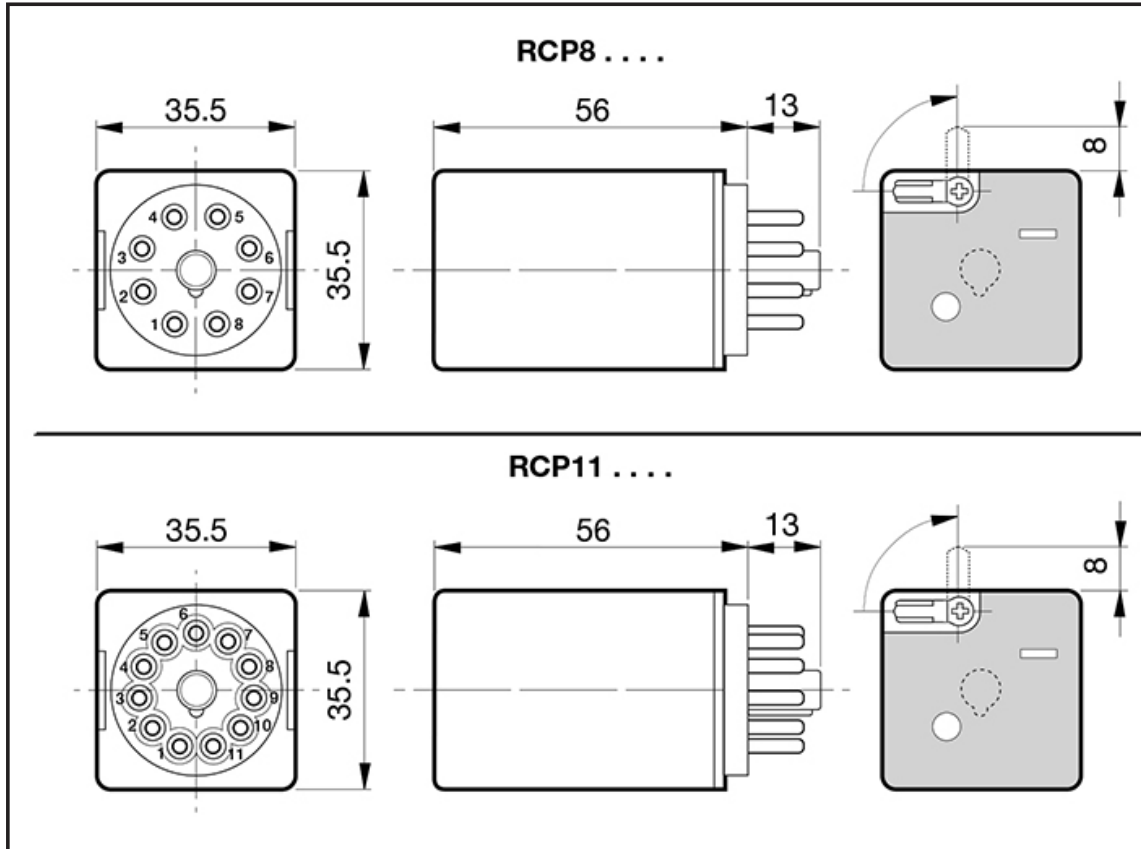

### Wiring Diagram

2 Pole / 8 Pin Changeover &  
3 Pole / 11 Pin Changeover Relays

