


FXAP - PS Plastic Access Panels

Read these instructions before commencing installation and retain them for future reference.

Specification:

- Material: Tough and UV stabilized 3mm high impact PS plastic
- Panel Colour: White
- Fully removable hinged doors
- Concealed mechanical hinges
- Textured surface allows painting or wall papering on-site if required
- Applications: plumbing, ducts, valves, switches, walls, ceilings, cupboard units, etc.
- Installed in minutes using basic hand tools and silicone sealant or other suitable grade building adhesive
- Easy to open door by using a straight screwdriver in the existing slot and easing open
- Standard size(inch): 4x6, 6x9, 8x8, 12x12 and 14x14.

Dimensions:

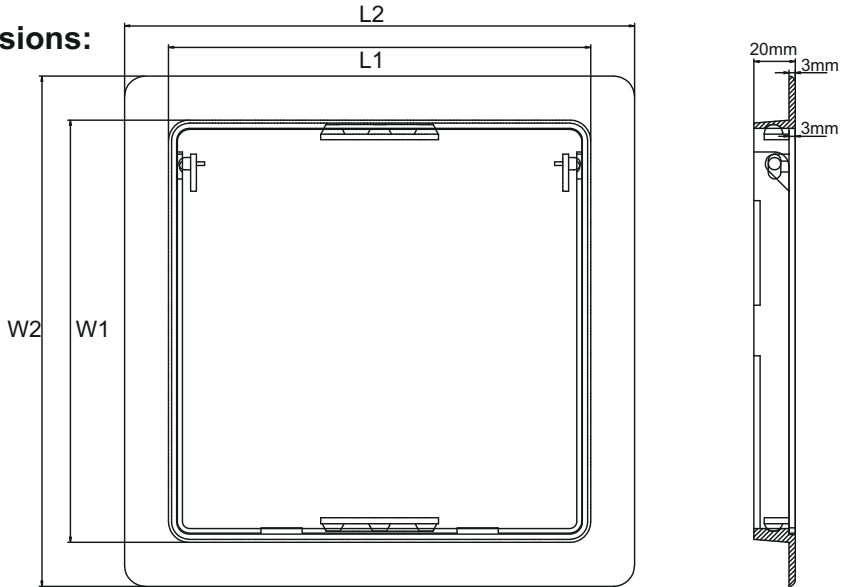

Model No.	Normal Size		Neck Size	Overall Size
	(inch)	(mm)	W1 x L1 (mm)	W2 x L2 (mm)
FXAP46	4" x 6"	100 x 150	102 x 152	130 x 181
FXAP69	6" x 9"	150 x 225	152 x 228	195 x 272
FXAP88	8" x 8"	200 x 200	203 x 203	247 x 247
FXAP1212	12" x 12"	300 x 300	299 x 299	357 x 357
FXAP1414	14" x 14"	350 x 350	355 x 355	412 x 412

Installation Instructions:

Step 1

Prepare the necessary tools: knife, silicone sealant or construction adhesive and the plastic access panel.



Step 2

Use the included paper template to mark the cut-out or place the access panel against the wall and mark around the inner frame of the panel.



Step 3

Carefully cut the aperture on the wall.



Step 4

Remove the panel from the door frame and apply the adhesive all around the backside of the frame.




Step 5

Insert the door frame into the opening, make sure it is level and press firmly until the adhesive is set. Remove any excess adhesive and leave to set.



Step 6

Fit the door back in to the frame. To open the door use a straight screwdriver in the existing slot on the edge of the door and ease open.

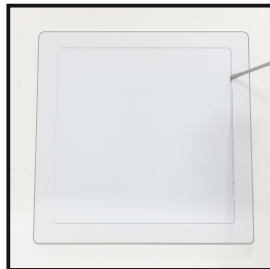

UV RESISTANT
PLASTIC



READY TO PAINT



HIGH IMPACT
PS PLASTIC